

Component assembly from Beta LAYOUT

www.beta-layout.com




In order to avoid errors and time delays caused by faulty or incomplete data we need your "Bill of Materials" file in a special format. The way of creating this file is described below. Some standard components like resistors and capacitors are in our stock and are listed in the file "Beta_Stock_day_month_year.BOMdb". You can merge them with your parts list, if you wish.

Please note, that this will only work, if you used the R-EU_ resistors, C-EU and CPOL-EU parts from the original rcl.lbr library from EAGLE.

1

Download the file "eng_pp_assembling_beta_eagle.zip".

Extract the files to:
C:\Beta LAYOUT\PCB-POOL BOM\

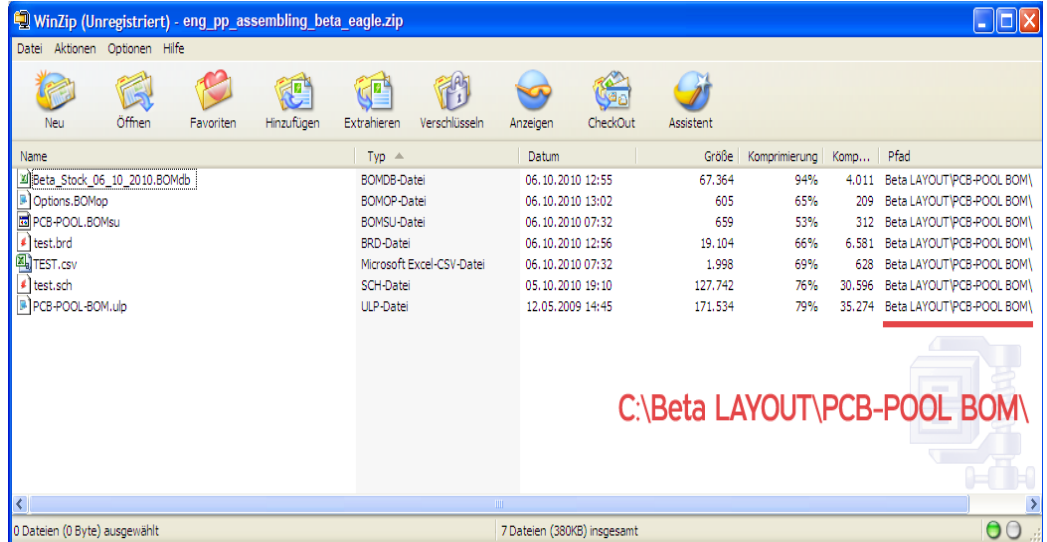


2

Start EAGLE and open the file "test.sch". Make sure, you have your *.brd file in the same folder.

Run the ULP
"C:\Beta LAYOUT\PCB-POOL BOM\PCB-POOL-BOM-17.ulp"

This ULP is initially based on a BOM.ulp supplied with EAGLE in 2004 and was improved over the years by Robert A. Rioja. The original version can be downloaded from the CadSoft website.

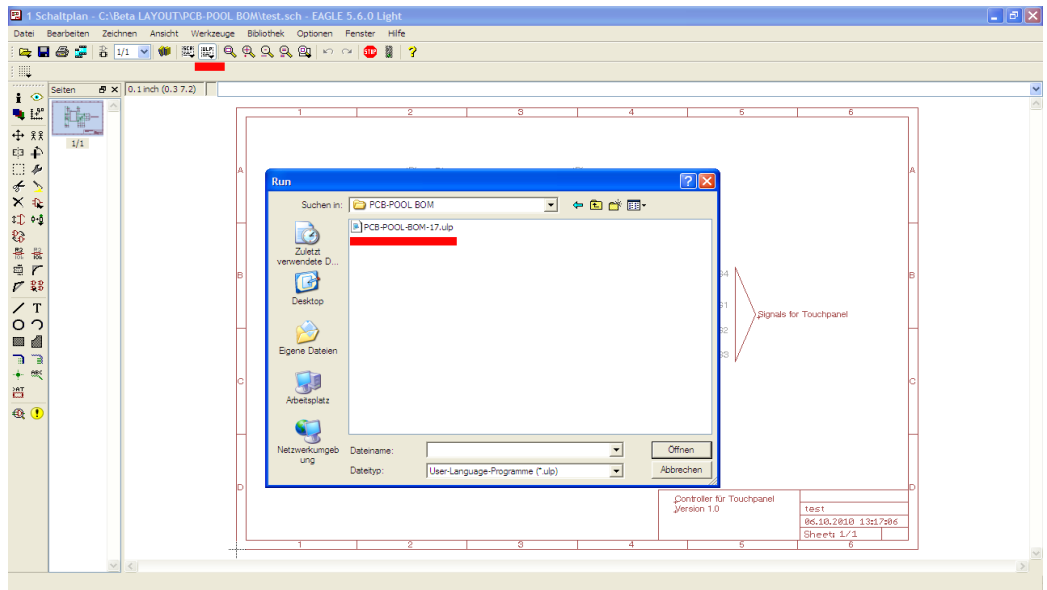


3

Your Schematic tab should display the picture on the right.

Make sure, that in the lower left corner the "Grouped by" option is set to "Same values".


All parts that were found in the file "Beta_Stock_day_month_year.BOMdb" are automatically merged.

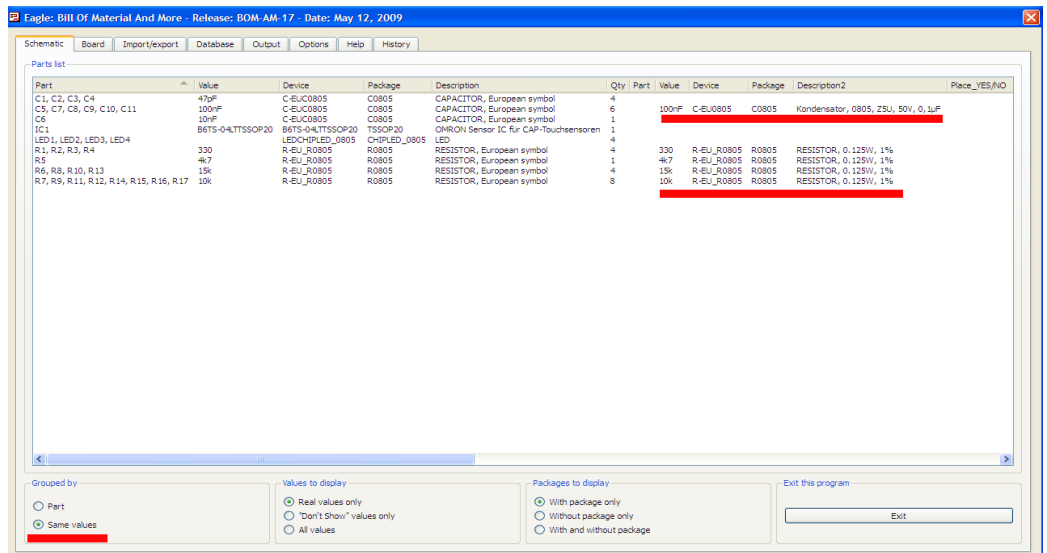

4

Check that the Database tab shows the content of the actual Beta_Stock database.

If not, you can load the file "Beta_Stock_day_month_year.BOMdb" with the button "Open Database".

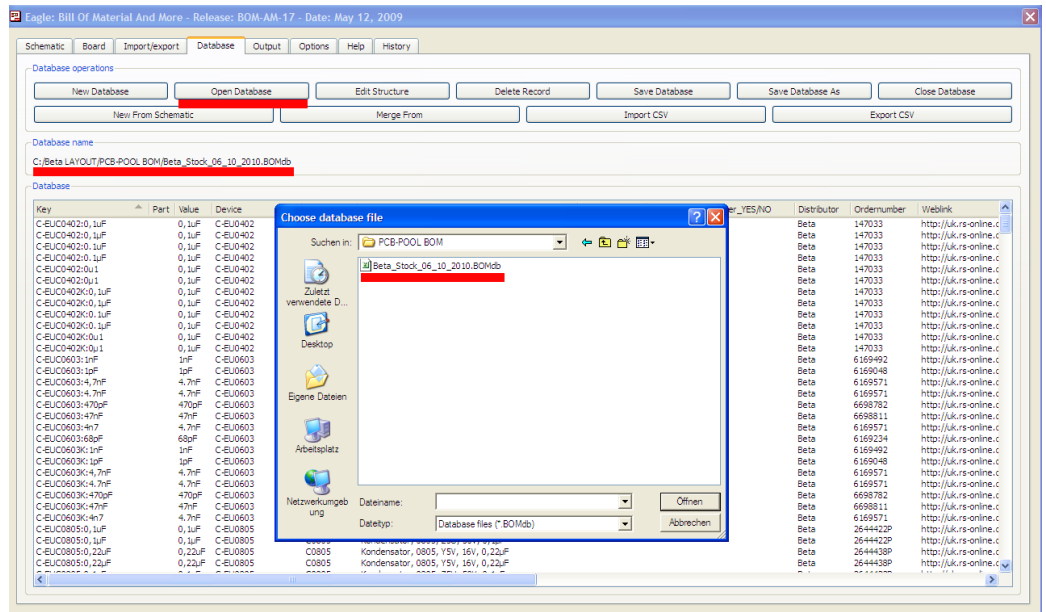


5

Make sure, that in the Output tab the "PCB-POOL.BOMsu" – Setupfile is loaded.

If not, please load it with the button "Get Setup" in the lower right corner.


It is important, that the "PCB-POOL.BOMsu" – Setupfile is loaded after the "Beta_Stock_day_month_year.BOMdb" database file (see 4).

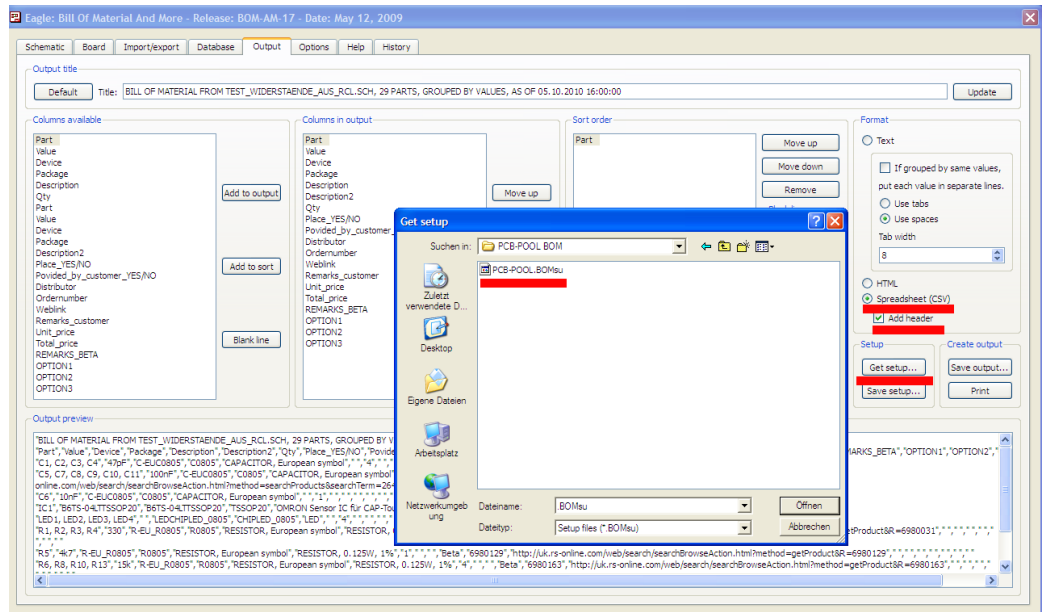

6

Write your "Bill of Materials" file with the button "Save output".

Make sure that you use the Spreadsheet Format.

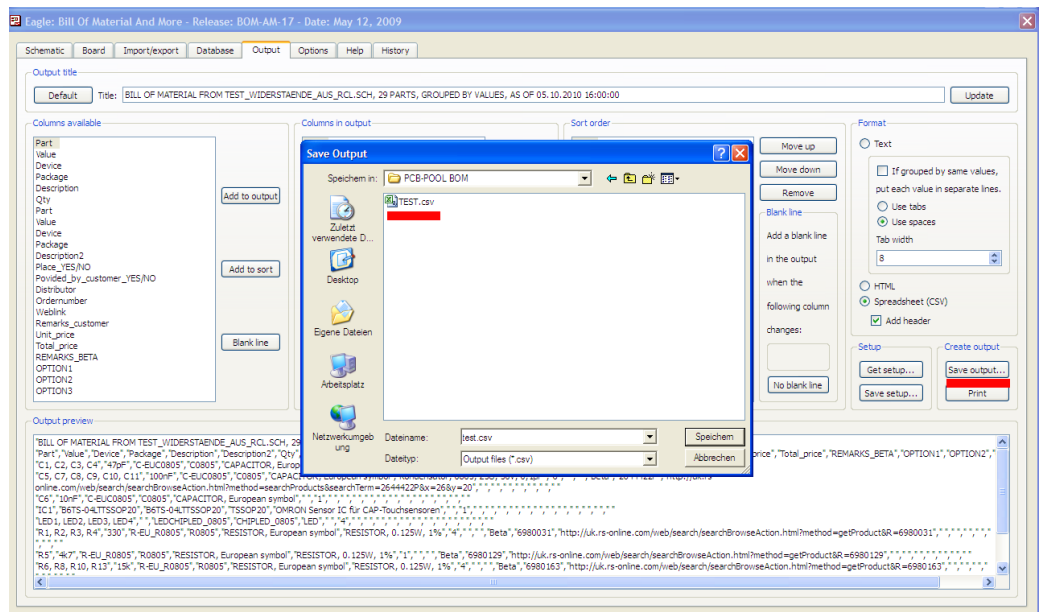

7

Import your "Bill of Material" file in Excel.

If you are experiencing problems reading in a *.csv file (nothing seems separated) try the following:

- rename the *.csv file in *.txt
- open Excel
- click on "Open File"
- choose "all files (*.*)"
- select your *.txt file
- in the following dialog choose "separated by comma (,)"

Part	Value	Device	Package	Description	Description2	Qty	Place_YES/NO	Provided_by_customer_YES/NO	Distributor	Ordernumber	Weblink
C1, C2, C3, C4	47pF	C-EUC0805	C0805	CAPACITOR, European symbol		4					
C5, C7, C8, C9, C10, C11	100n	C-EUC0805	C0805	CAPACITOR, European symbol		6	Y	Y			
C4	10n	C-EUC0805	C0805	CAPACITOR, European symbol		1	Y	Y			
C1	B6TS-Q4LTTSSOP20	B6TS-Q4LTTSSOP20	TSSOP20	OMRON Sensor /C fuer CAP-Touch		1	Y	Y			
LED1, LED2, LED3, LED4		LEDCHIPLED_0805	CHIPLED_0805	LED		4	Y	Y			
R1, R2, R3, R4	330	R-EU_R0805	R0805	RESISTOR, European symbol	RESISTOR, 0.125W,	4	Y		N Beta	6980031	http://U
R5	4k7	R-EU_R0805	R0805	RESISTOR, European symbol	RESISTOR, 0.125W,	1	Y		N Beta	6980129	http://U
R6, R8, R10, R13	15k	R-EU_R0805	R0805	RESISTOR, European symbol	RESISTOR, 0.125W,	4	Y		N Beta	6980163	http://U
R7, R9, R11, R12, R14, R15, R16, R1, 10k		R-EU_R0805	R0805	RESISTOR, European symbol	RESISTOR, 0.125W,	8	Y		N Beta	6980154	http://U

Now fill in the following fields:

- Place_YES/NO** (should we assemble this component?)
- Provided_by_customer_YES/NO** (are you shipping this component to us?)
- Distributor** (where can we buy this component?)
- Ordernumber** (what is the ordernumber of this component when we order it from the given distributor)
- Weblink** (help us to find your component, especially if it is a part that is not very common)
- Remarks_customer** (anything you want to comment with this component)

The rest of the fields will be filled in by us. Nothing to do here for you.

Please note: We can only accept distributors with an on-line ordering facility (shopping basket) and EURO currency.

Congratulations – you are done!

Use this file to order your assembly service from Beta LAYOUT.



GmbH
PCB-POOL®
Im Aartal 14
65326 Aarbergen